


UltraSelf Bailer®

Passively Filter Hydrocarbons From Stormwater In Outdoor Containment Products



- The best protection for non-monitored containment sites.
- Helps eliminate problems associated with the collection of rainwater in outdoor containment products.
- Simple installation — can be connected to any outdoor containment product.
- Hydrocarbon “sheens” and modest spills are captured — clean stormwater drains through the outflow port.
- Larger or concentrated spills activate “auto-shutoff” mechanism.
- Manual shutoff valve can be used to secure all draining operations, change out the filter cartridge.
- Filters are quickly and easily replaced.

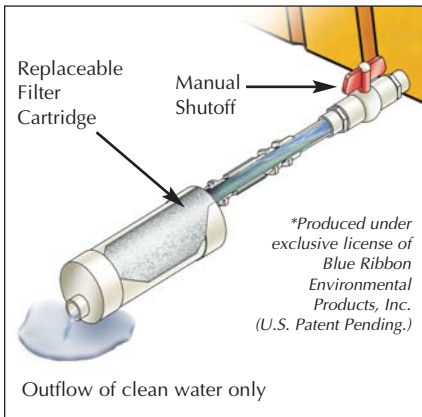

| ULTRA-SELF BAILER | | | |
|---|--|--|--|
| Part# 9935: standard | Part# 9937: large | Part# 9926: XL | Part# 9928: XXL |
| Dimensions: 28" L x 3 1/2" dia. (712 mm x 89 mm dia.) | Dimensions: 36" L x 4 1/2" dia. (915 mm x 115 mm dia.) | Dimensions: 39" L x 6 1/2" dia. (991 mm x 166 mm dia.) | Dimensions: 43" L x 9" dia. (1,093 mm x 229 mm dia.) |
| Weight: 2 lbs. (1 kg) | Weight: 6 lbs. (3 kg) | Weight: 11 lbs. (5 kg) | Weight: 16 lbs. (7 kg) |
| Flow Rate: 7.5 gallons per hour* (29 L per hour*) | Flow Rate: 22 gallons per hour* (84 L per hour*) | Flow Rate: 42 gallons per hour* (159 L per hour*) | Flow Rate: 55 gallons per hour* (209 L per hour*) |
| Material: PVC | Material: PVC | Material: PVC | Material: PVC |
| Replacement Filter Cartridges 2-Pack Part #9936 | Replacement Filter Cartridge 1-Pack Part #9938 | Replacement Filter Cartridge 1-Pack Part #9927 | Replacement Filter Cartridge 1-Pack Part #9929 |

* At 2" WC (Head Pressure)

Use with IBC Spill Pallets, Containment Sumps and other outdoor containment products.



UltraContainment Berms®

Foam Wall Model

Low Profile Design Is Perfect For Equipment Maintenance And Portable Drum Containment

- Low, 2" sidewall contains spills — keeps plant floors and soil free from contamination.
- No set-up required — simply unfold for quick deployment.
- Folded units require minimal storage space.
- Custom sidewall heights available.



| ULTRA-CONTAINMENT BERMS, FOAM WALL MODEL | | | |
|--|---|-----------------|--------------------|
| Part# | Dimensions | Weight | Capacity |
| 8385 | 5'10" x 7' x 2" OD (1,778 mm x 2,134 mm x 51 mm) | 24 lbs. (11 kg) | 25 gallons (95 L) |
| 8386 | 7'10" x 9' x 2" OD (2,388 mm x 2,743 mm x 51 mm) | 30 lbs. (14 kg) | 55 gallons (208 L) |
| 8387 | 9'10" x 11' x 2" OD (2,997 mm x 3,353 mm x 51 mm) | 38 lbs. (17 kg) | 88 gallons (333 L) |
| Material of Construction: Copolymer 2000™ an ethylene copolymer, is standard. Copolymer 3000™, XR5, polyurethane and other materials are also available on a custom basis. Optional Ground Tarp 11' x 11' • 20 lbs. • Part # 8311 | | | |

Standard Sizes:

4' x 6' x 2" I.D. 6' x 8' x 2" I.D. 8' x 10' x 2" I.D.
Any custom size available.