


Ultra Drain Plugs®

- Tapered design wedges securely into standard drains to stop any flow.
- Eyebolts are removable, allowing installation of grating with Drain Plug in place.
- Non-absorbing, easily cleaned for repeated use.



ULTRA-DRAIN PLUGS

Flexible polyurethane material	2" dia. (51 mm dia.) conical plug, Weight: 2 lbs. (1 kg)
Resists oil, water and most aggressive chemicals	3" dia. (77 mm dia.) conical plug, Weight: 2 lbs. (1 kg)
Prevents contaminants from entering drain	4" dia. (102 mm dia.) conical plug, Weight: 3 lbs. (1.5 kg)
Non-absorbing material	6" dia. (153 mm dia.) conical plug, Weight: 6 lbs. (3 kg)
Cleans with soap and water	8" dia. (204 mm dia.) conical plug, Weight: 13 lbs. (6 kg)
Safety orange color	10" dia. (254 mm dia.) conical plug, Weight: 16 lbs. (7.5 kg)
	12" dia. (305 mm dia.) conical plug, Weight: 25 lbs. (11 kg)

STANDARD SIZES:


- 2" Diameter Part# 2113
- 3" Diameter Part# 2114
- 4" Diameter Part# 2115
- 6" Diameter Part# 2117
- 8" Diameter Part# 2118
- 10" Diameter Part# 2119
- 12" Diameter Part# 2121
- 3-Plug Kit* Part# 2116

* (Includes one each of 2", 3" and 4" Ultra-Drain Plugs and Plastic Carrying Case.)

Ultra Repair Putty®

Epoxy Putty Tackles The Toughest Repair Jobs

Part# 2120

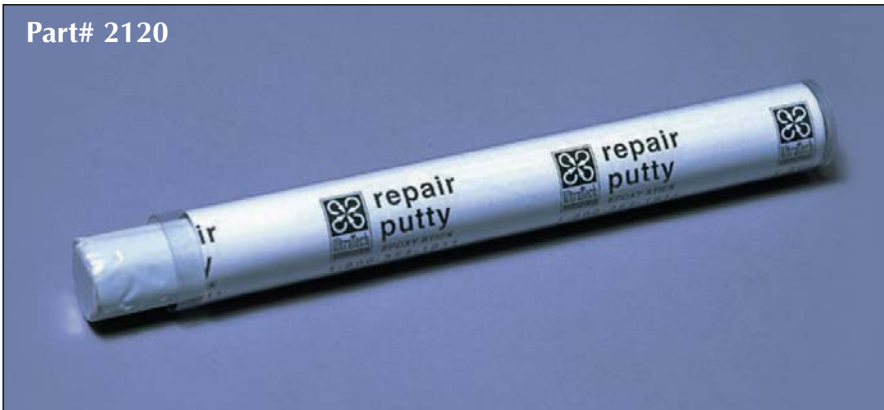

- Adheres to steel, glass, masonry and most plastics.
- A quick and effective solution to cracks, broken seals and leaks.
- Simply pinch off the amount desired, knead to a uniform gray and press into place.
- Hardens like steel in only one hour!



ULTRA-REPAIR PUTTY

<p>Product & Packaging 7" L x 7/8" dia. (178 mm L x 22 mm dia.) 12 sticks per box. Shipping weight: 4 lbs. (2 kg)</p>	<p>Physical Properties Density: 15 4/5 lbs/gallon (1 9/10 gm/cm³) Modulus of Elasticity: 6 x 10⁵ psi Hardness (Shore D): 85 Compression Strength: 18,000 psi Shear Strength: 700 psi Temp. (Intermittent): 300°F (149°C) Tensile Strength: 6,000 psi Izod Impact: 3 ft.-lb./in. of notch Temp. (Continuous): 250°F (121°C)</p>
<p>Storage Conditions Exothermic reaction at 123°F (51° C). Unaffected by cold. Best used when warm.</p>	
<p>Shelf Life Several years if stored in original tube with cap on.</p>	