

Reduce Oil and Sediment Flowing Through Trench Drains and Pipes

- Filter design forces water to flow around and through a series of X-Tex filter strips — sand, silt and sediment are trapped between the strips while hydrocarbons are absorbed by the X-Tex material.
- Unit has a 10 ft. x 2ft. section of filter strips — nylon cord is sewn along the entire length of the fabric for added strength.



- Loops on each end allow TrenchFilters to be connected together for long runs of trench/pipe.
- Ten-foot cord (included) can be used to tie off TrenchFilter and secure it in place.
- Helps meet new Stormwater Management Regulations — NPDES 40 CFR 122.26 (1999). Considered a Best Management Practice (BMP).


ULTRA-TRENCHFILTER

Part# 9700

Dimensions: 10' L x 2' W

Absorbs up to 0.5 gallons of oil per unit

Weight: 2 lbs.

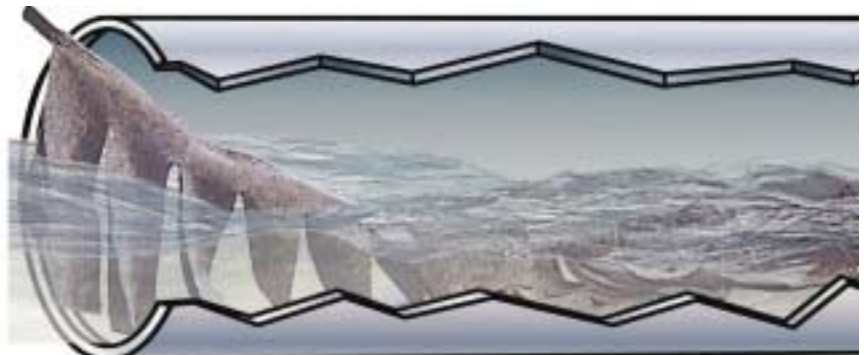

The filter strips create mixing and turbulence as stormwater travels around and through the X-Tex fabric.



U.S. Patent No. 6,632,501